



Motorola W385 Front Casing Replacement

Written By: Austin Hobbs



INTRODUCTION

Is the plastic casing cracked or severely scratched? Replace it.



TOOLS:

- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)



PARTS:


- [Motorola W385 Casing](#) (1)
-

Step 1 — Battery



- Using your finger, press down on the clip holding the back cover on.

Step 2

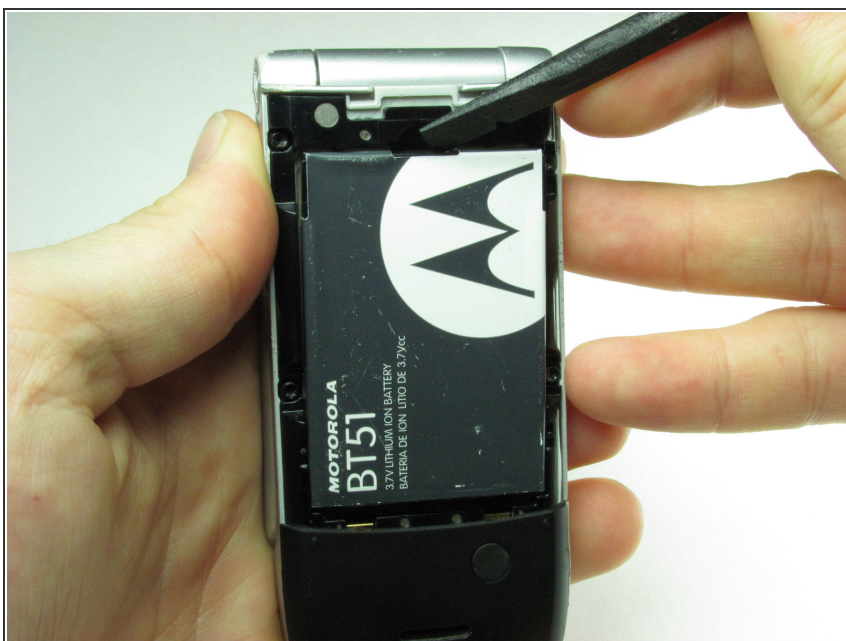

- Using the spudger or your finger, gently pull the battery out from the top.

Step 3 — Front Casing



- Remove the four rubber pieces from the face of the phone using the sharp end of the spudger.
- ⓘ The rubber pieces are held in with a mild adhesive.

Step 4



- Remove the four Torx-6 screws from underneath the rubber pieces.

Step 5



- Close the phone before proceeding.
 - Using the flat end of the spudger, insert it under the plastic at the top left of the phone.
 - Gently, although a small amount of force is required, use a twisting motion to pull the plastic casing away from the body of the phone.
 - Continue to move around the phone counter clockwise until the casing is separated from the body.
- i** It is not unusual for it to pop off before making it back to the starting point.

Step 6



- If the casing has not popped off of the body, remove it carefully from the the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-28 07:43:25 PM.